

ALTO Height-adjustable

Ergonomic desks





height-adjustable



Height-adjustable legs from
H 65 to H 130 cm

Cable Management

Straight top with a 2.5cm scalloped cut-out and 2x part-drilled 80mm port holes.

Top

25 mm thick Structorex® melamine-coated tops with 4 40 mm radius rounded corners. 2 mm thick shock-proof ABS edging.



Control

Motorised height adjustment system, with "up & down" control unit and 4 programmable positions.



Leg

Telescopic metal structure made of square 70 x 70 mm steel tubing, composed of 3 sections, electrically height-adjustable from H 65 to H 130 cm, with lacquered epoxy finish.

CHARACTERISTICS

BLACK



— Metal legs finish —

NEBRASKA



TIMBER




WHITE



— Tops MFC finishes —

115 / 135 / 155 / 175



Straight tops
with
scalloped edge

155 / 175



Manager tops

115 / 135 / 155 / 175



Front view

80 / 90



Side view



Furniture in compliance with standards NF EN 527-1/-2/-3, NF EN 14074, NFD 62042, ISO 9241-5, XPD 60050 - M3 fire classification - 5-year warranty.



Tops

- Structurex® - melamine-coated boards (PPSM), 25 mm thick, 40 radius rounded corners, high density 650 kg/m³ (+/- 5 %), 2 decorative sides counterbalanced with anti-reflection treatment.
- Metal inserts for improved tear resistance and easier assembly.
- Straight and manager tops equipped with 2 Ø 80 mm part-drilled cable ports. Black standard or electrified cable ports available on option. Straight tops equipped with a 2,5 cm deep scallop.



Straight tops D 80 cm equipped with a D 2,5 cm scalloped edge (Internal length : L 40 cm for L 115 cm tops, L 60 cm for L 135 cm tops, L 80 cm for L 155 cm tops, L 100 for L 175 cm tops / D 25 mm).




Manager tops : D 80 / 90 cm x L 155 / L 175 cm tops


- 100 % PEFC tops from sustainably managed forests.
- E1 certification in compliance with NF EN-717-2 standard.
- M2 fire classification.

Legs



- Telescopic metal structure made of square 70 x 70 mm steel tubing.
- Composed of 3 sections. Height-adjustable from H 65 to H 130 cm.
- Laquered epoxy finish available : black (RAL 9005).
- Motorised height-adjustment system (drive unit built into each leg) with up & down color unit and 4 programmable positions.
- Anti-collision safety device with gyroscopic sensor, built into the drive unit.
- Displacement speed 40 mm/s. Sound level 38 decibel. 20 000 cycles or 5 years. 800 N push force.
- Maximum load 120 kg per top. 100-240 V and 50-60 kg power supply unit. 2 m power supply cable. Standby consumption of 0,1w/h.



Front view



Side view



Cable management


- **Tops** : Straight and manager tops equipped with 2 Ø 80 mm part-drilled cable ports. Black standard or electrified cable ports available on option. Straight tops equipped with a 2,5 cm deep scallop.



Straight tops D 80 cm equipped with a D 2,5 cm scalloped edge (Internal length : L 40 cm for L 115 cm tops, L 60 cm for L 135 cm tops, L 80 cm for L 155 cm tops, L 100 for L 175 cm tops / D 25 mm).



- **UK cable port power module :**

- Ø 100 mm electrified cable port, equipped with 1 power outlet (220 - 250 V, 50 / 60 Hz, 16 A) and 1 USB A 5v charging socket.
- Cable port in White or Black ABS plastic.
- 2 m power supply cable.
- Electrified cable ports are attached to the work tops instead of the Ø 80 mm standard cable ports or via the Ø 80 mm part-drilled ports, depending on versions.
- For tops from 8 to 50 mm thick.
- 65 mm clearance under desk top.



- **Universal single metal tray :**

- Optional sheet steel metal cable tray.
- For single desks (**compatible with the optional fabric acoustic screen panel**).
- Attachment by wood screws under the top.
- Cable tray D 120 x H 90 x L 600 mm (under the top). Internal height : 80 mm.
- Aluminum, white or black finishes.






height-adjustable



[Options]

• Fabric acoustic screen panels :

- Office screens with acoustic fabric finish, 25 mm thick.
- The fabric screens are made of 1 x 19 mm thick Structutex® melamine-coated panels with rounded corners (radius 30 mm) covered with sound-absorbing melamine foam.
- Screens covered in Step Melange fabric, 100% Trevira CS, M1 fire resistance panel, certified Oeko-Tex®.
- 4 sizes of fabric front dividers : L 120 / L 140 / L 160 / L 180 cm. Each is 40 cm high and clamped on worktops.
- Metal fixing clamps available in 3 different colours aluminium (RAL 9006), black (RAL 9005) and white (RAL 9016) to match our desk frames. BeWall screens will fit on single desks and multiworkstations (fixed or sliding).
- Material : 4 mm thick steel sheet.

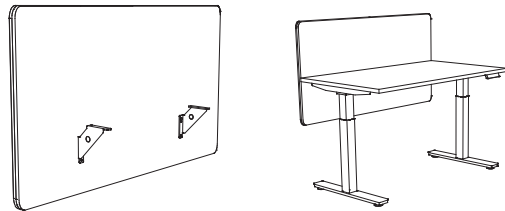

Screen panel – single desk



height-adjustable

