





Synoptic


COHESION TABLES - with cable management

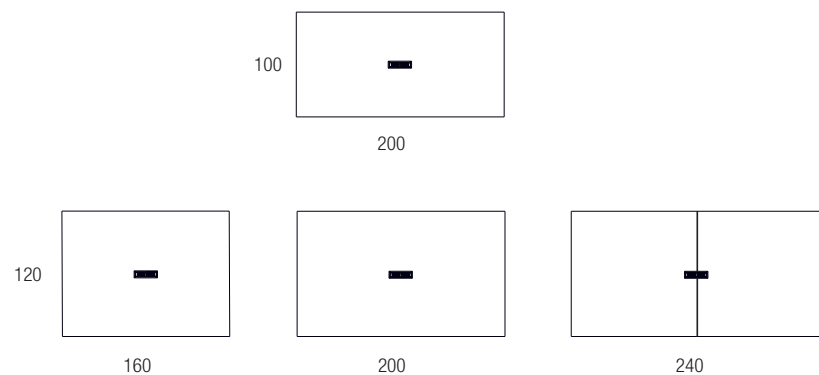

COHESION TABLES - without cable management

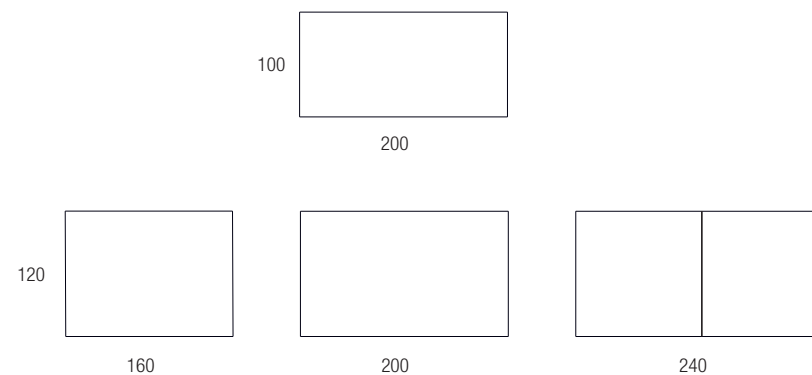

CHARACTERISTICS

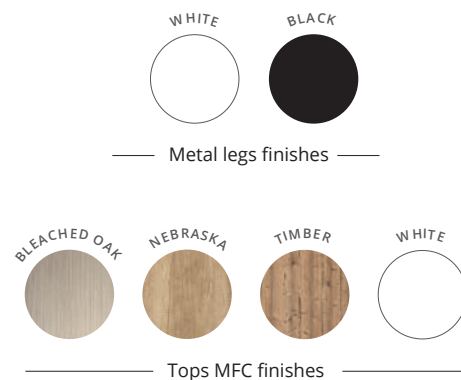

Electrification (depending on version)

Built-in electrical socket strip
equipped with 3 power outlets
+ 1 USB A charging socket 5v
+ 1 USB C charging socket 5v
+ 1 cable port.



Top

38 mm thick Nitech® honeycomb
melamine-coated tops. 2 mm
thick shock-proof ABS edging.
Height 74 cm.







Screw feet

Adjustable screw feet
to compensate for any
unevenness in the floor.

Leg

Metal "A" arch leg composed of 50 x 50 mm square
cross-section legs, with a transverse bar at the bottom,
lacquered epoxy finish.

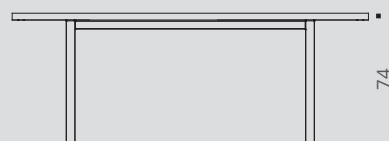




Tops

- Nitech® – cardboard honeycomb core faced with 8 mm thick melamine-coated particle board, 38 mm thick, density 330 kg/m³ (+/- 5 %), 2 decorative sides counterbalanced with anti-reflection treatment.
- 3 mm thick protective edging covered with 2 mm thick shock-proof ABS straight edging, radiused and matching the top finishes.
- Metal inserts for improved tear resistance and easier assembly.
- Tops available in depth 100 and 120 cm / L 160, L 200 or L 240 cm (depending on layout).
- Cable management : Available with or without central built-in electrical socket strip (cutout dim. L313 x D59 mm), equipped with 3 power outlets + 1 USB A charging socket 5v + 1 USB C charging socket 5v + 1 cable port.
- 100 % PEFC tops from sustainably managed forests.
- Honeycomb core 100 % recycled paper.
- E1 certification in compliance with standard NF EN-717-2.
- M3 fire classification.


Legs

- Metal “A” arch leg composed of 50 x 50 mm square cross-section legs, with a transverse bar in the bottom, lacquered epoxy finishes available : white (RAL 9016) – black (RAL 9005).
- 74 cm high worktops. Adjustable screw jacks (Ø 40 mm), stroke 10 mm, mounted on metal thread.



Structures

- Structural metal beams, cross-section 45 x 25 mm, equipped with 2 end fittings to connect the legs and provide perfect stability.
- Height under beam : +/- 65 cm.
- Lacquered epoxy finishes available matching the legs : white (RAL 9016) – black (RAL 9005).
- Tables without cable management fitted with 1 beam.
- Tables with cable management fitted with 2 beams.



Cable management

• Tops :

- Available with or without built-in electrical socket strip (cutout dim. L 313 x D 59 mm), equipped with 3 power outlets + 1 USB A charging socket 5v + 1 USB C charging socket 5v + 1 cable port.
- The electrical socket strip is pre-wired with 2 m cable for the power outlets.
- Customisation of electrical units with 4 kits as options :



2 RJ45 + finishing cover



1 RJ45 + 1 HDMI + finishing cover




1 RJ45 + 1 data USB A
+ finishing cover



1 data USB A + 1 HDMI
+ finishing cover

The cable port can be replaced by one of the 4 optional kits of your choice

- A plastic universal cable duct is included for tables with cable management D 65 x H 45 x L 155 mm.



• Vertical cable management :

- By optional magnetic metal cable channel (L 45 x D 15 x H 610 mm), available in 2 finishes matching the legs.

