

# FIFTY-FULL

## Reception



WARRANTY  
**10**  
YEARS

#### Side

25 mm thick Structurex® melamine-coated panels. 2 mm thick shock-proof ABS edging.

#### Top

25 mm thick Structurex® melamine-coated panels. 2 mm thick shock-proof ABS edging.

#### Infill panel

25 mm thick Structurex® melamine-coated panels with elegant 45° mitre cut serving as reception shelf for visitors.

#### Front panel

25 mm thick Structurex® melamine-coated panels.

#### Leg

25 mm thick Structurex® melamine-coated panels. End DDA<sup>(1)</sup> unit leg and top are of the same finish.

Support leg (optional)  
Recommended for any installation of  
more than 3 aligned modules

Support brackets





(1) DDA = Disability Discrimination Act.



## CHARACTERISTICS





### COUNTERS





### COUNTERS WITH RIGHT OR LEFT HAND DDA<sup>(1)</sup>



### COUNTERS WITH CENTRAL DDA<sup>(1)</sup>

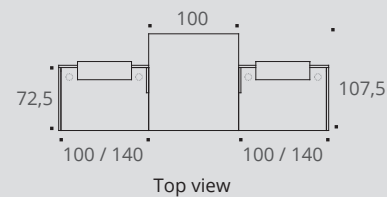

### COUNTERS WITH 90° CORNER AND LOW RECEPTION DESK ON THE RIGHT OR ON THE LEFT

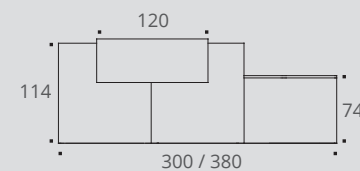


## Reception counter

### General description


- Structurex® Melamine-coated particle board, 25 mm thick, high density 650 kg/m<sup>3</sup> (+/-5 %), 2 decorative sides counterbalanced with anti-reflection treatment.
- 2 mm thick shock-proof ABS edging, radiused and matching the top finishes.
- Adjustable screw feet of Ø 25 mm and 10 mm stroke to compensate for any unevenness in the floor.
- The tops and sides are all equipped with Ø 80 mm part-drilled cable ports enabling electrical supply to the work tops. Cable ports covers available on option.
- The modules are assembled using a metal connection kit - dimensions L 5 x H 29 cm and by a metal support bracket in epoxy lacquered aluminium finish (RAL 9006).
- The connection kit is equipped with sliding metal cap, for a neat aesthetic and by a metal support bracket in epoxy lacquered aluminium finish (RAL 9006).
- Square 50 x 50 mm support foot, lacquered epoxy, with 10 mm adjustment cylinder, to be positioned at the junction of the work surfaces. Recommended for any installation of more than 3 aligned modules.
- Return, corner or intermediate units can be added to the reception counter to adapt to changing requirements, to ensure mobility and ergonomics of use.
- 100 % PEFC tops from sustainably managed forests.
- E1 certification in compliance with NF EN-717-2 standard.
- M2 fire classification.

## Return units

- Dimensions : L 100 or L 140 cm x D 72,5 cm x H 74 cm or H 109 cm - worktop H 74 cm.
- Available in left or right version, making it possible to finalise the reception counter or add further return extensions.
- Internal dimensions L 100 cm, module : L 97,5 cm and L 95 cm when the corner module is combined with a central DDA<sup>(1)</sup> module, thanks to the discretion panel.
- Internal dimensions L 140 cm, module : L 137,5 cm and L 135 cm when the corner module is combined with a central DDA<sup>(1)</sup> module, thanks to the discretion panel.
- Return units equipped with a side panel to guarantee privacy for reception counter users (assembly not required).

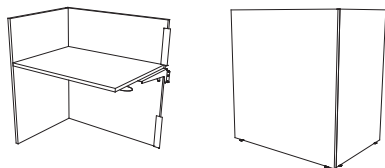

High return unit

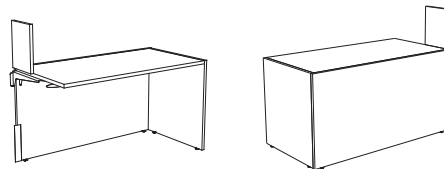


Low return unit


## FIFTY-FULL

## Intermediate units

- Dimensions : L 100 or L 140 x D 72,5 x H 74 or H 109 cm - worktop H 74 cm.
- By adding this module, users can add infinitely to the reception counter, on front and return of the reception counter.
- Low intermediate unit equipped with side panels to guarantee privacy for reception counter users (assembly not required).

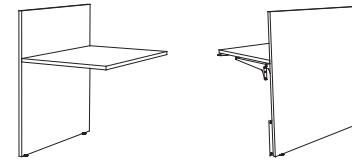

High intermediate unit

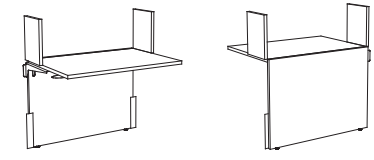

Low intermediate unit

## Right/Left or intermediate DDA<sup>(1)</sup> unit

- Dimensions : L 100 cm in central version and L 102,5 cm in end left or right version D 107,5 x H 109 cm - worktop H 74 cm.
- Intermediate or end DDA units equipped with a side panel to guarantee privacy for reception counter users (assembly not required).



Right or left end DDA<sup>(1)</sup> unit



Intermediate DDA<sup>(1)</sup> unit

## 90° corner unit

- Dimensions : L 100 x H 109 x D 100 cm - worktop H 74 cm.
- Internal dimensions : 82 cm
- Unit equipped with side panels to guarantee privacy for reception counter users (assembly not required).



Low intermediate unit with 90° corner

## Infill panel

- Infill panel acting as reception shelf for visitors.
- Available in L 60 cm or L 120 cm x H 47 cm x D 20,5 cm.
- Perfect junction between panels with 45° mitre cut.
- To be placed on an high intermediate unit or return unit.

